

Power MIG® 180C (CE)

Power MIG®. The Professional's Choice™.

The Power MIG® 180C (CE) will help you get the job done! It's a portable wire welder designed for use with industrial 230 volt input power, so you can weld on thicker material—up to 3/16" (3.2 mm) with MIG welding and 1/2" (12.7 mm) with gas-less flux-cored welding.

Use the continuous voltage control to precisely dial in the settings some thin sheet metal and aluminum applications require for optimal results.

Lincoln® Diamond Core Technology™ and the rugged industrial drive system will make it easy to get great results on steel, stainless or aluminum. Compare performance, features and price. . . you'll settle on Power MIG®. The Professional's Choice™!

Processes
MIG, Flux-Cored



Shown:
K2661-1 Power MIG® 180C (CE)

Advantage Lincoln

Superior Arc Performance:

- **Exclusive Diamond Core Technology™** delivers an outstanding arc you notice immediately compared to competitive models:
 - Great arc starts make getting started easy.
 - Wide voltage 'sweet spot' gives you a very forgiving arc, so setting controls is a snap.
 - Extremely low spatter reduces clean-up.
 - Outstanding aluminum & stainless performance, not just mild steel.
- **Wide 30 – 180 amp welding output range** is the highest output in its class – use .025" (0.6 mm) wire on the thinnest sheet metal up to .045" (1.1 mm) flux-cored wire for thick plate.
- **MIG weld 24 gauge up through 3/16" (3.2 mm)** sheet metal in a single pass. Weld up to 1/2" (12.7 mm) steel using self-shielded Lincoln® Innershield® wires (FCAW-S).

Professional Features:

- **Industrial Cast Aluminum Drive** features:
 - Dual gear-driven drive rolls for positive traction.
 - Patented split wire guides for optimal wire alignment.
 - Brass-to-Brass gun connections for enhanced connectivity.
 - Large industrial closed-design drive motor for improved torque and trouble-free performance.

- **No Hassle Tool-less Design** – for wire spool mounting, wire drive service and polarity changes.
- **Get More, Do More** – Start out with more contact tips, nozzles, drive rolls and wire electrode for MIG or flux-cored welding.
- **Standard Spot Timer** – For making consistent spot and tack welds.
- **Innovative contact tip, drive roll and nozzle storage** keeps all your consumables close at hand.
- **Electrically 'cold' electrode** provides an added measure of operator safety.

Superb Quality:

- **Patent-pending Power Chassis™** channels airflow to cool power systems, structurally secures key components and traps wires and cables to avoid unnecessary abrasion.
- **Toughest PC Board Protection in the industry** – 'Potted' to seal sensitive components from the environment. 'Trayed' in a tough plastic tray to add rigidity and shock resistance.
- **CE/RoHS Compliant Thermal Protection** – System activates to protect internal components if necessary.
- Meets IEC 974-1, EN-60974-1, IP21S, CE and RoHS requirements.
- Three Year Lincoln Warranty.

TECHNICAL SPECIFICATIONS

Product Name	Product Number	Input Power	Rated Output Current/Voltage/Duty Cycle	Input Current @ Rated Output	Output Range	Dimensions H x W x D inches (mm)	Net Weight lbs. (kg)
Power MIG® 180C (CE)	K2661-1	230/1/50/60	130A/20V/25%	20A	30-180 Amps DC 50-500 ipm WFS (1.3-12.7 m/min) Max. OCV: 33	14 x 10.15 x 18.6 (357 x 258 x 472)	66 (30)


A CLOSER LOOK

SUPERIOR ARC PERFORMANCE

Diamond Core Technology™ delivers a superior arc across the entire welding range.



Thin Sheet Metal Autobody Work

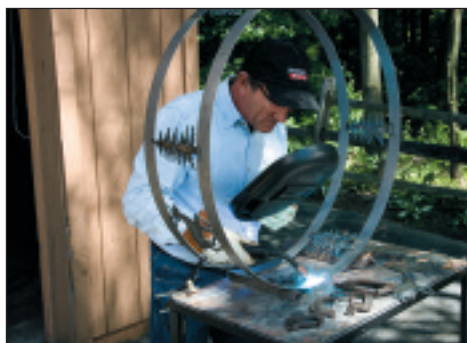

Home Projects



Repair Work


PROFESSIONAL WIRE DRIVE

Enhanced Quality

1. Brass Gun Connection Enhances Connectivity
2. Rigid Cast Aluminum Drive Aids Wire Alignment
3. Patented Split Wire Guide Reduces Tangles
4. Dual Gear-Driven Drive Rolls Deliver Positive Traction

Easy to Use

5. Easy Turn Tension Adjustment
6. Tool-less Quick Lock Drive Roll Changeover

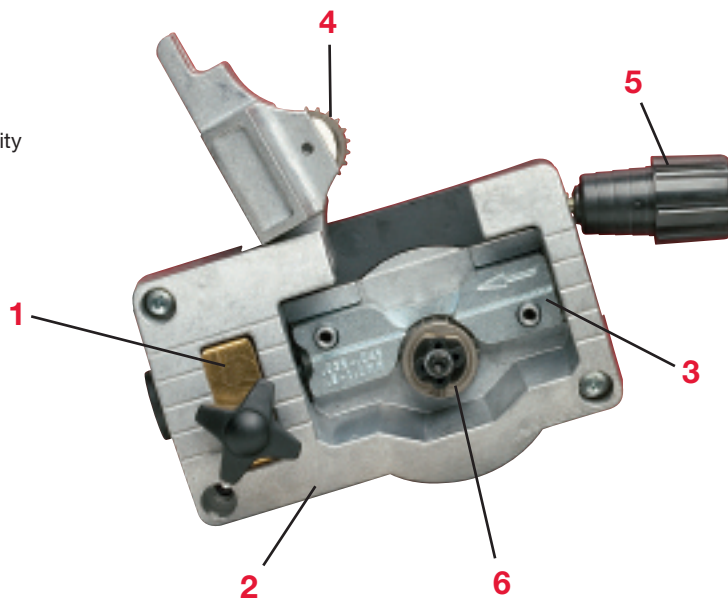

A CLOSER LOOK

WHAT'S INCLUDED

Power MIG® 180C (CE) (K2661-1) Includes:

Gun

- Binzel® gun and 10 ft. (3.0 m) cable assembly with brass gun connection and 4-pin MS-Type connection for trigger control
- .025" (0.6 mm) Contact Tips (Qty. 2)
- .030" (0.8 mm) Contact Tips (Qty. 2)
- .035" (0.9 mm) Contact Tips (Qty. 2) (1 installed)
- Gasless Nozzle for Innershield® welding (installed)
- Gas Nozzle for MIG welding

Drive

- Spindle Adapter for 8" (203 mm) Diameter Spools (M15445-R)
- .045" (1.1 mm) Wire Diameter Wire Guide (KP2531-2)
- .025"-.035" (0.6-0.9 mm) Wire Diameter Wire Guide (KP2531-1) (installed)
- .025"-.030" (0.6-0.7 mm) Wire Diameter Drive Roll for MIG welding (KP2529-1)

- .035" (0.9 mm) Wire Diameter Drive Roll for MIG welding (KP2529-2)
- .030"-.045" (0.7-1.1 mm) Wire Diameter Knurled Drive Roll for Flux-Cored welding (KP2529-3) (installed)

Shielding Gas Apparatus

- 10 ft. (3.0 m) Gas Hose

Welding Wire


- 2 lb. (0.90 kg) Spool of .025" (0.6 mm) diameter SuperArc® L-56® premium MIG wire (ED030583)
- 1 lb. (0.45 kg) Spool of .035" (0.9 mm) diameter Innershield® NR®-211-MP flux-cored wire (ED027641)

Other

- Work Clamp and 10 ft. (3.0 m) Cable
- Instruction Manual (IM-890)
- Learn to Weld Manual (LTW1)

PERFORMANCE PLUS

Power MIG® 180C (CE) Welding Capabilities

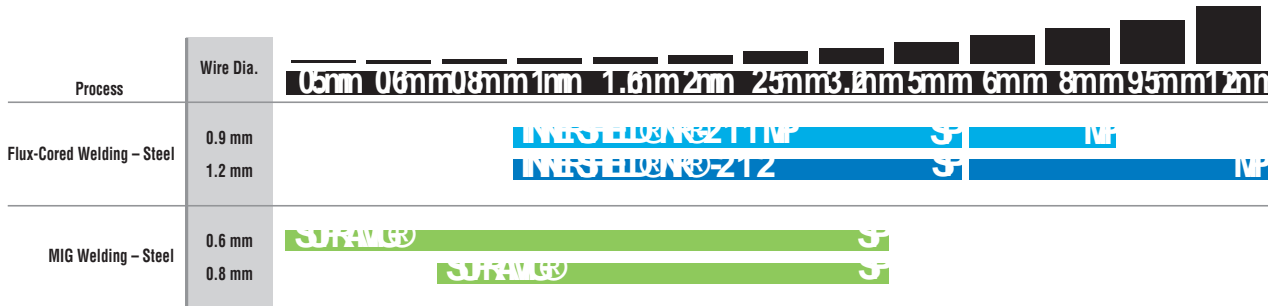

SP = Single Pass.
MP = Multiple Pass.

DRIVE ROLLS AND WIRE GUIDES

Product Number	Wire Diameter in (mm)	Type/Process
Drive Rolls		
KP2529-1	.025-.030 (0.6-0.7)	Smooth/MIG
KP2529-2	.035 (0.9)	Smooth/MIG
KP2529-3	.030-.035 (0.8-1.1)	Knurled/Flux-Cored
Inner Wire Guides		
KP2531-1	.025-.035 (0.6-0.9)	All
KP2531-2	.045 (1.1)	All

RECOMMENDED OPTIONS

GENERAL OPTIONS



Welding Cart
Full-featured cart is designed to store and transport a welder, 80 cubic foot gas cylinder, welding cables and accessories. Includes an angled top shelf for easy access to welder controls, a lower tray for added storage space, a sturdy handle and a convenient cable wrap hanger.
Order K2275-1



Utility Cart
Heavy duty cart stores and transports welder, 150 cubic foot shielding gas cylinder, welding cables and accessories. Includes stable platforms for welder and gas bottle platform, lower tray for added storage capacity and adjustable height handle.
Order K520



Small Canvas Cover
Protect your welder when not in use. Made from attractive red canvas that is flame retardant, mildew resistant and water repellent. Includes a convenient side pocket to hold your welding torch or gun.
Order K2377-1

WIRE FEEDER OPTIONS



.045" (1.1 mm) Innershield® Kit
Includes everything required to weld with .045" (1.1 mm) Innershield® self-shielded flux-cored wire. Includes an .035"-.045" (0.9-1.1 mm) Magnum® 100L gun liner, a .045" (1.1 mm) contact tip, a gasless nozzle, knurled drive roll, .045" (1.1 mm) inner wire guide and a 10 lb. (4.5 kg) spool of .045" (1.1 mm) Innershield® NR®-212 wire.
Order K2528-1



Welding Fume Extractors
Lincoln offers a wide variety of welding fume extraction environmental system solutions, ranging from portable systems easily wheeled around the shop to shop-wide central systems servicing many dedicated welding stations.
Request Publication E13.40

POWER MIG® 180 (CE) ORDER FORM

PRODUCT DESCRIPTION	ORDER NUMBER	QUANTITY	PRICE
POWER MIG® 180C (CE)	K2661-1		
Recommended General Options			
Welding Cart	K2275-1		
Utility Cart	K520		
Small Canvas Cover	K2377-1		
Recommended Wire Feeder Options			
.045" (1.1 mm) Innershield® Kit	K2528-1		
Welding Fume Extractors	See Bulletin E13.40		
	TOTAL:		

CUSTOMER ASSISTANCE POLICY

The business of The Lincoln Electric Company® is manufacturing and selling high quality welding equipment, consumables, and cutting equipment. Our challenge is to meet the needs of our customers and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric® for advice or information about their use of our products. We respond to our customers based on the best information in our possession at that time. Lincoln Electric® is not in a position to warrant or guarantee such advice, and assumes no liability, with respect to such information or advice. We expressly disclaim any warranty of any kind, including any warranty of fitness for any customer's particular purpose, with respect to such information or advice. As a matter of practical consideration, we also cannot assume any responsibility for updating or correcting any such information or advice once it has been given, nor does the provision of information or advice create, expand or alter any warranty with respect to the sale of our products.

Lincoln Electric® is a responsible manufacturer, but the selection and use of specific products sold by Lincoln Electric® is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric® affect the results obtained in applying these types of fabrication methods and service requirements.

Subject to Change – This information is accurate to the best of our knowledge at the time of printing. Please refer to www.lincolnelectric.com for any updated information.



THE LINCOLN ELECTRIC COMPANY®

22801 St. Clair Ave., Cleveland, OH 44117-1199 • 216.481.8100 • www.lincolnelectric.com

THE WELDING EXPERTS®