

**HM SERIES STAINLESS STEEL
Horizontal Multistage Pumps
Model Numbers: HM60, HM90, HM160 &
HM270**

DEPEND ON
DAVEY

WATER PRODUCTS

**GENERAL TRANSFER
PUMPS**

**PRODUCT
DESCRIPTION**

Compact, all stainless steel horizontal multistage centrifugal pump & motor unit.

APPLICATIONS

- Specific applications include:-
- Water supply, boosting & transfer
 - Irrigation & turf watering
 - Wash down
 - Emptying/filling reservoirs or tanks
 - Water treatment (demineralisation, filtering etc)
 - Commercial washing equipment



FEATURES & BENEFITS

Horizontal multistage centrifugal pump with all hydraulic parts in stainless steel

- Suitable for high water temperatures
- Corrosion & wear resistant

Axial suction & vertical discharge

- Compact design
- Easy to install

Stainless steel impellers with high efficiency impeller profile & thick self-centring impeller neck rings for

- High efficiency
- Reduced power consumption
- Low noise output

Impellers mounted directly on extended shaft

- Maximise performance per stage
- High efficiency
- Long motor & pump life
- Increased wear resistance

Pump casing assembly attached to motor bracket at 8 points with oring seal

- Complete stainless casing
- Better sealing
- Longer service life

Davey built, totally enclosed fan cooled (TEFC) electric motor:

- Single-phase motors have built in thermal overload protection with automatic reset and 1.8m long power lead and Australian 3 pin plug
- Sealed and greased for life motor bearings
- Over sized drive bearing
- Longer life
- Easy service
- Economical & quiet running

Automatic control options:
Davey Torrium®

Standard pressure switch & gauge
Multiple pump system

- Versatile system design
- Simple automatic control
- Suitable for many applications

OPERATING LIMITS

Capacities up to 430lpm
(26m³/hr)

Pressure heads up to 65m

Max. operating pressure 1000kPa

Max. suction pressure 600kPa

Temperature range -15° to +105°C

Max. ambient temperature +50°C



Suitable fluids

Clean, clear, non-corrosive, non-flammable liquids with no fibres and little sand/silica or abrasives (maximum concentration 40g/m³).





TECHNICAL SPECIFICATIONS

HM60 HYDRAULIC PERFORMANCE

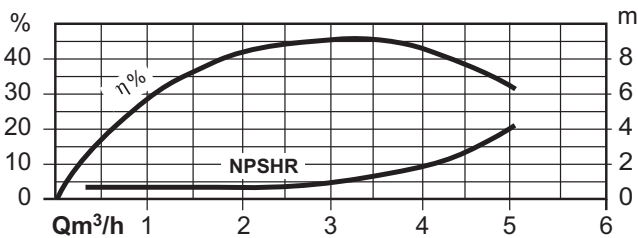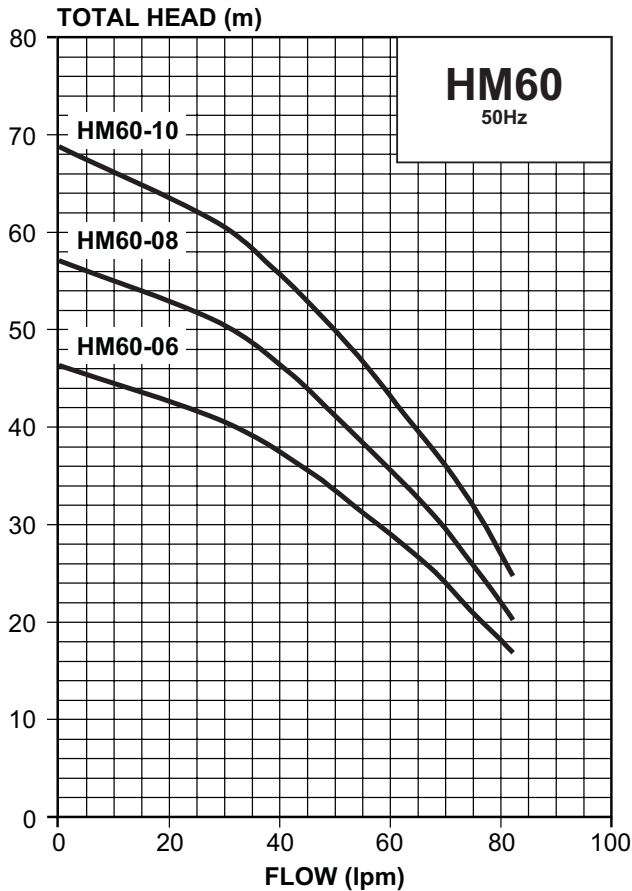

HM90 HYDRAULIC PERFORMANCE

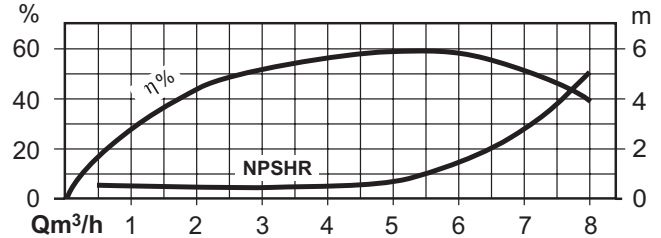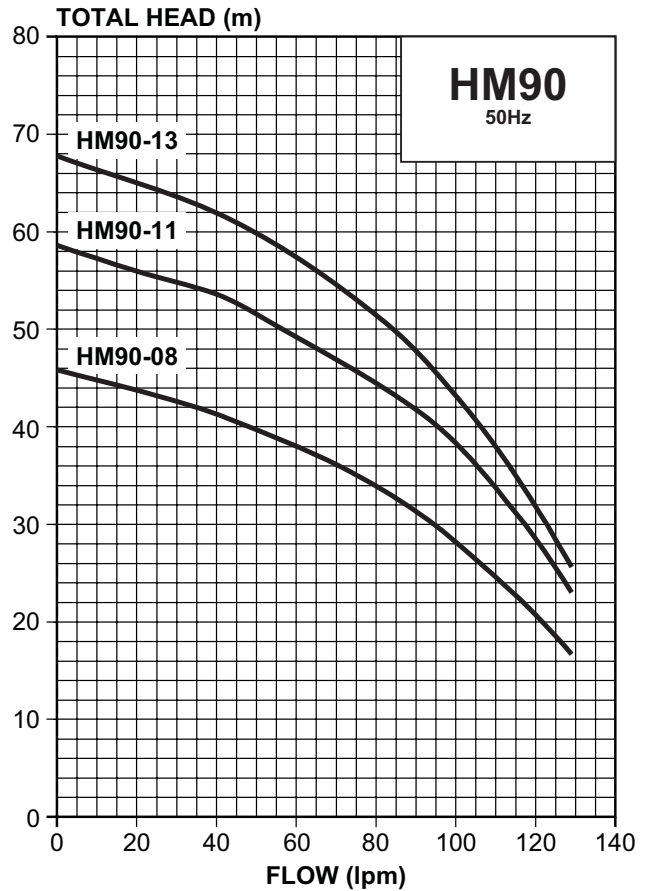


MATERIALS OF CONSTRUCTION

PART	MATERIAL
Casing	304 stainless steel
Impellers	304 stainless steel
Stages (casing)	304 stainless steel
Pump shaft	316L stainless steel
Stage centring device	304 stainless steel
Mechanical seal	Carbon/ceramic
Orings	EPDM
Plugs	316L stainless steel
Motor shell & lantern bracket	Aluminium with baked polyester powder coat finish
Motor feet	Xenoy®
Fan cowl / rear foot (models up to 1.05kW)	Polypropylene

IDENTIFICATION OF THE PUMP



HM 160-19/3

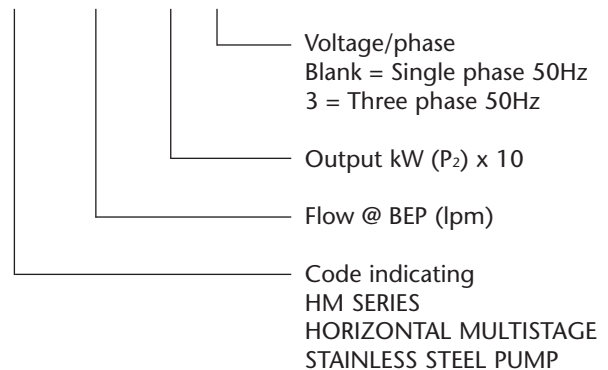



Note: 304 stainless steel, (Z6 CN 18.9) and **316L stainless steel** (Z2 CND 17.12) are recommended materials that are highly resistant to corrosion.

TECHNICAL SPECIFICATIONS

HM160 HYDRAULIC PERFORMANCE

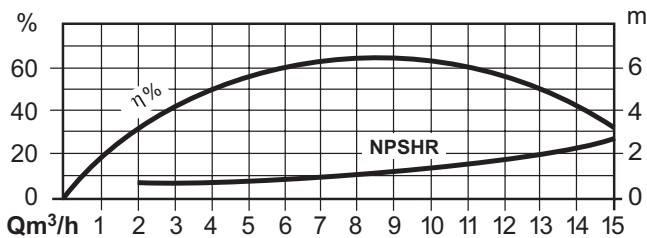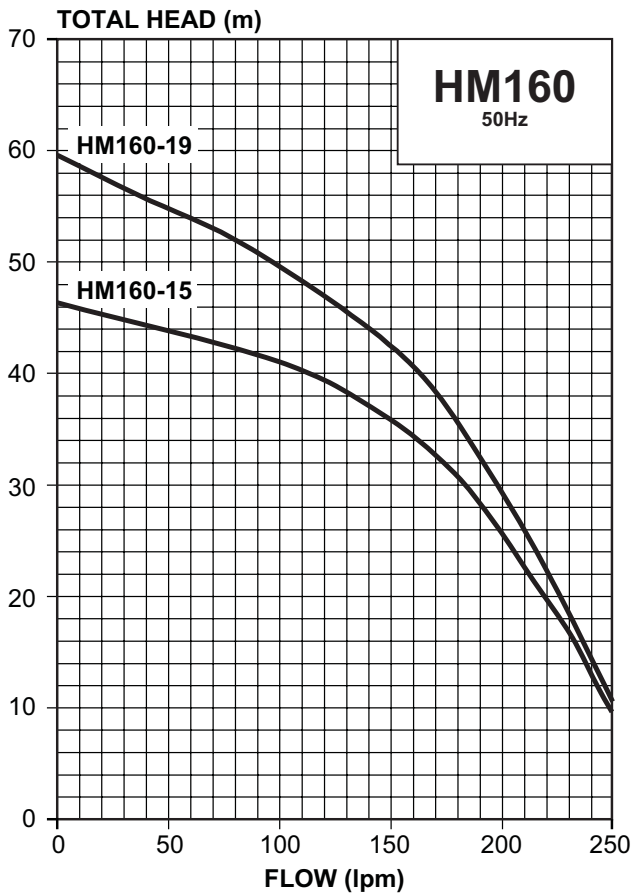

HM270 HYDRAULIC PERFORMANCE

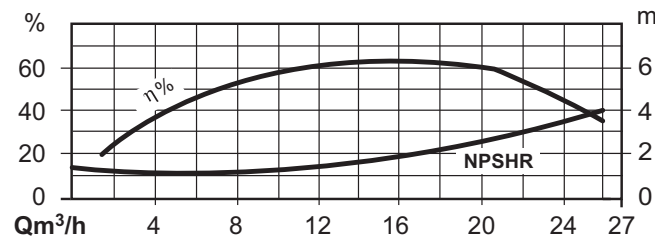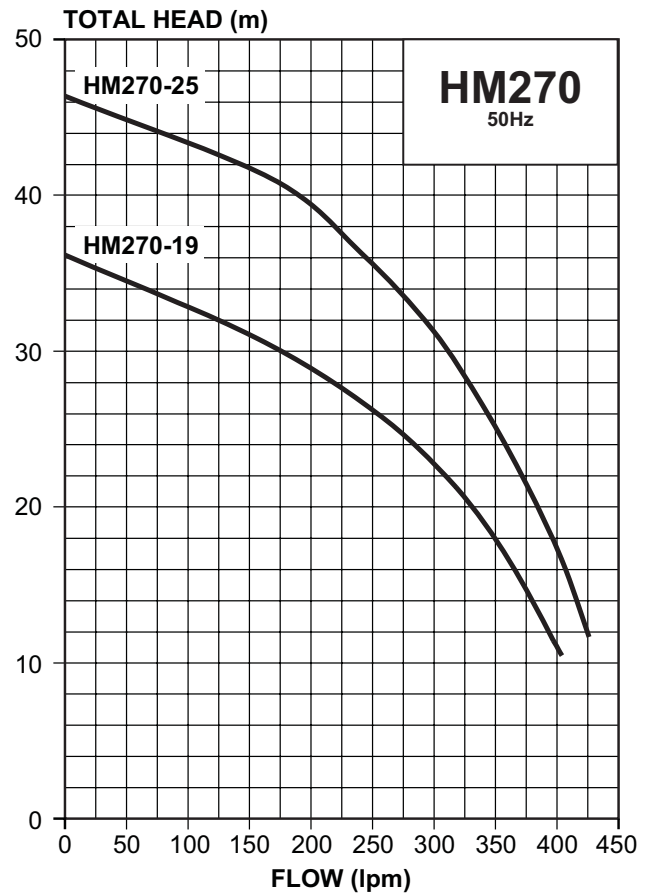



ELECTRICAL DATA

Speed	2900rpm
Supply voltage	
Single phase	230V ±10%
Three phase*	415V ±10%
Supply frequency	50Hz
Insulation class	Class F
Enclosure class	
HM60-06, HM60-08, HM60-10, HM90-08 & HM90-11	IP55
All other models	IP56

*Selected models

TECHNICAL SPECIFICATIONS

DIMENSIONS

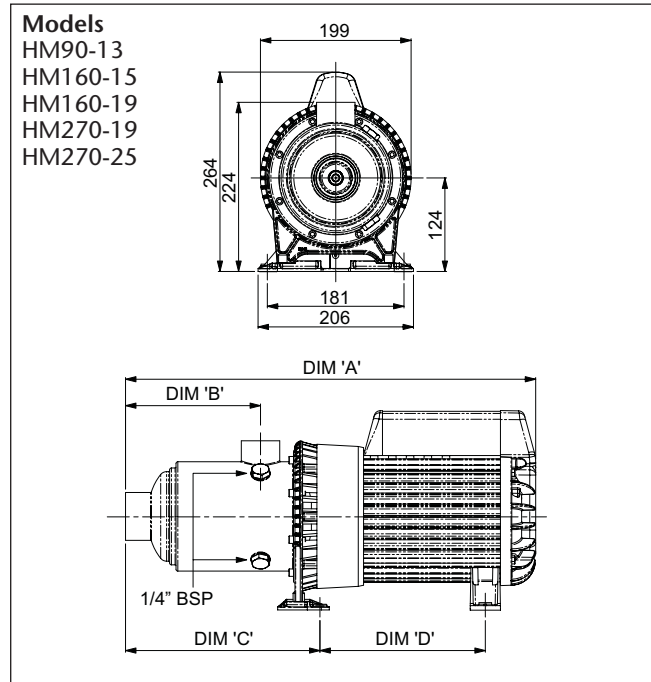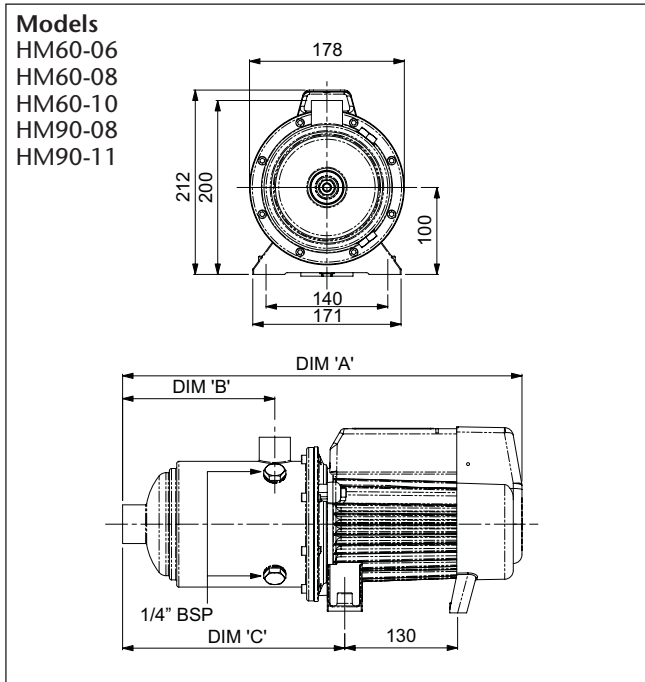

240V Single Phase Models

Pump Model	Motor				Ports		Pump Dimensions				Weight kg
	Input P ₁ kW	Output P ₂ kW	Run Amps	Start Amps	Suction BSP	Discharge BSP	DIM 'A' mm	DIM 'B' mm	DIM 'C' mm	DIM 'D' mm	
HM60-06	0.85	0.58	4	18	1 1/4"	1"	411	127	207	-	11.3
HM60-08	1	0.72	4.5	18	1 1/4"	1"	459	175	255	-	12.2
HM60-10	1.25	0.94	5.9	28	1 1/4"	1"	459	175	255	-	17.0
HM90-08	1.1	0.78	4.9	20	1 1/4"	1"	411	127	207	-	11.7
HM90-11	1.4	1.05	6.5	28	1 1/4"	1"	459	175	255	-	16.4
HM90-13	1.7	1.4	7.2	40	1 1/4"	1"	502	175	247	189	22.2
HM160-15	1.9	1.5	8	40	1 1/2"	1 1/4"	509	178	254	189	21.8
HM160-19	2.3	1.8	9.7	40	1 1/2"	1 1/4"	509	178	254	189	22.1
HM270-19	2.4	1.9	10	40	2"	1 1/2"	512	178	257	189	24.0
HM270-25	3.2	2.5	13.8	66	2"	1 1/2"	562	178	257	239	31.3

415V Three Phase Models

Pump Model	Motor				Ports		Pump Dimensions				Weight kg
	Input P ₁ kW	Output P ₂ kW	Run Amps	Start Amps	Suction BSP	Discharge BSP	DIM 'A' mm	DIM 'B' mm	DIM 'C' mm	DIM 'D' mm	
HM60-06/3	0.75	0.58	1.9	13	1 1/4"	1"	411	127	207	-	11.3
HM60-08/3	0.85	0.72	2.1	13	1 1/4"	1"	459	175	255	-	12.2
HM60-10/3	1.25	0.94	3.2	20	1 1/4"	1"	459	175	255	-	17.0
HM90-08/3	1.1	0.78	2.2	13	1 1/4"	1"	411	127	207	-	11.3
HM90-11/3	1.4	1.05	3.3	20	1 1/4"	1"	459	175	255	-	16.4
HM90-13/3	1.6	1.4	3.1	24	1 1/4"	1"	502	175	247	189	22.2
HM160-15/3	1.8	1.5	3.2	24	1 1/2"	1 1/4"	509	178	254	189	21.8
HM160-19/3	2.1	1.8	3.6	24	1 1/2"	1 1/4"	509	178	254	189	22.1
HM270-19/3	2.3	1.9	3.8	24	2"	1 1/2"	512	178	257	189	24.0
HM270-25/3	2.95	2.5	4.9	30	2"	1 1/2"	562	178	257	239	27.8

This literature is not a complete guide to product usage. Further information is available from your Davey dealer, Davey Customer Service Centre and from the relevant product Installation and Operating Instructions. This data sheet must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice. © Davey is a registered trademark of Davey Products Pty Ltd. © Davey Products Pty Ltd 2006.



DEPEND ON
DAVEY

WATER PRODUCTS

Davey Products Pty Ltd

Member of the GUD Group
ABN 18 066 327 517
Head Office and Manufacturing
6 Lakeview Drive,
Scoresby, Australia 3179
Ph: +61 3 9730 9222
Fax: +61 3 9753 4100
Website: davey.com.au
Customer Service Centre
Ph: 1300 367 866
Fax: 1300 369 119
E-mail: sales@davey.com.au
Interstate Offices
Sydney • Brisbane - Adelaide
Perth • Townsville

International

6 Lakeview Drive,
Scoresby, Australia 3179
Ph: +61 3 9730 9121
Fax: +61 3 9753 4248
E-mail: export@davey.com.au

Germany

Kantstrasse 47,
04275 Leipzig
Ph: +49 341 301 0412
Fax: +49 341 301 0413
E-mail: akrenz@daveyeurope.com

New Zealand

2 Rothwell Avenue,
North Harbour, Auckland 1330
Ph: +64 9 914 3680
Fax: +64 9 914 3685
Website: daveynz.co.nz
E-mail: sales@daveynz.co.nz

USA - Davey Pumps Inc.

1005 N. Commons Drive
Aurora, Illinois 60504
Ph: +1 630 898 6976
Fax: +1 630 851 7744
Website: daveyusa.com
E-mail: sales@daveyusa.com